(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 14 July 2005 (14.07.2005)

PCT

(10) International Publication Number WO 2005/064272 A1

(51) International Patent Classification7: G01C 9/26, 9/28

(21) International Application Number:

PCT/IL2003/001123

(22) International Filing Date:

31 December 2003 (31.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): KAPRO INDUSTRIES LTD [IL/IL]; Kibbutz Kadarim, 12390 MP Bikat Beit Hakerem (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LEVINSON, Amy [IL/IL]; Kibbutz Amiad, 12335 MP Upper Galilee 1 (IL). KOHNER, Gabriel [IL/IL]; Kibbutz Amiad, 12335 MP Upper Galilee (IL).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, HE (utility model), EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FL, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POCKET LEVEL

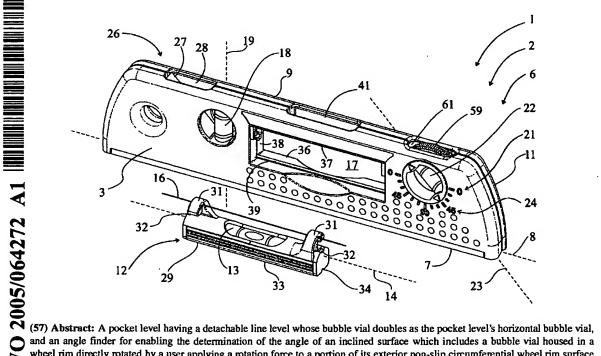

and an angle finder for enabling the determination of the angle of an inclined surface which includes a bubble vial housed in a wheel rim directly rotated by a user applying a rotation force to a portion of its exterior non-slip circumferential wheel rim surface preferably accessible via a throughgoing cutout formed in the pocket level's upper surface.